

Bluetooth

Cobra[®]
Premium Handsfree Headset



CBTH2

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Cobra Electronics Corporation is under license. Other trademarks and trade names are those of their respective owners.

©2008 Cobra Electronics Corporation
Cobra, Nothing Comes Close to a Cobra and the snake design are registered trademarks of Cobra Electronics Corporation, USA.
Cobra Electronics Corporation is a trademark of Cobra Electronics Corporation, USA.


Aries
2001 West Kelley Court
Libertyville, IL 60048
www.CobraHandsfree.com
866.610.9322 (USA only)

MADE IN KOREA

Table of contents	
■ Included in package	4
■ Part description	5
■ Using the Bluetooth® Wireless Headset Part I	6
▶ Charging	
▶ Low battery	
▶ Power on	
▶ Power off	
■ Using the Bluetooth® Wireless Headset Part II	7
▶ Pairing	
■ Using the Bluetooth® Wireless Headset Part III	8
▶ Connecting	
- Call connection	
- Auto reconnect	
▶ Volume control	
■ Using the Bluetooth® Wireless Headset Part IV	9
▶ Calling	
- Answering a call	
- Making a call	
- Voice dialing	
- Ending a call	
- Call waiting	
- Standby	
- Transferring a call	
- Mic mute	
■ Summary of button functions	10
▶ LED indication	
■ Troubleshooting	11
■ Specification and features	12
■ Precautions	13
■ Warranty	14


Included in package

The Cobra Over the Ear **Bluetooth**[®] Headset is a wireless headset that uses **Bluetooth**[®] wireless technology. This product supports a headset profile or handsfree profile.

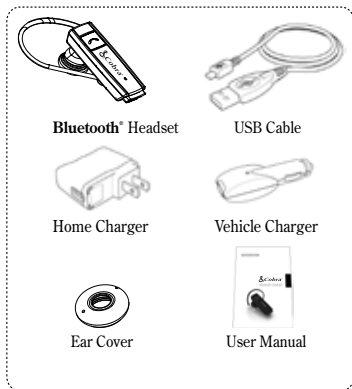


Parts description

>> Front View

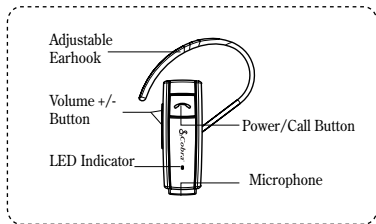

>> Back View

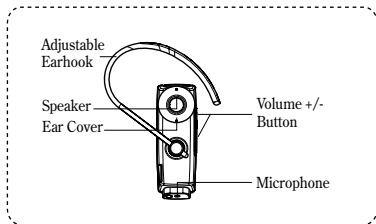

Using the Bluetooth® Wireless Headset Part I

▶ Charging

- Remove the cover on the charging port and connect the charger.
- When the charger is connected with power on, the Headset will turn off.
- The LED indicator will be on during charging. It indicates that your headset is being charged.
- Charging will be completed within three hours and the LED indicator will be turned off.



▶ Low battery

- When the battery power is low, you will hear the melody indicating the insufficient power. The LED indicator will be blinked and then turn off.
- In this case, please charge the battery again.

▶ Power on

- Press and hold the power/call button for 3 seconds.
- You will hear the melody as the power is turned on.

▶ Power off

- Press and hold the power/call button for 3 seconds.
- You will hear the melody as the power is turned off. At the same time, the **Bluetooth®** link will be disconnected.

Using the Bluetooth® Wireless Headset Part II

▶ Pairing

- While the power is turned off, press and hold the power/call button (continue to hold through out the pairing process).
- You will hear the melody indicating that the power is on. After that, you will hear the short beep.

The LED indicator will start blinking rapidly.

This indicates that the Headset has entered into pairing mode.

When turning on the power initially after purchase, the Headset will enter to the 'Pairing Mode' automatically.

- Using your handset, find the '**Bluetooth®**' menu' and 'search for' or 'add' new devices.
- Select 'CBTH2' from the list of devices and pair it with your handset.
- When asked for the Pass/PIN code while pairing, enter '0000'.
- When the Pairing has completed, you will hear a beep.
- If you want to pair the Headset with another device, repeat the above steps.
- If it will be not connected the 'Pairing' for five minutes, the Headset will be turned off.



Using the Bluetooth® Wireless Headset Part III

► Connecting

Call Connection

- Briefly press the power/call button to activated 'Voice command'.
(Your handset must support the 'voice dial' function)
- Press the power/call button for 1 second to activate last number redial.
(Some handset will show the list of calls. At this point, briefly press the power/call button to activate last number.)
- To end a call, briefly press the power/call button.

Auto Reconnect

- When the **Bluetooth®** wireless headset and your handset are separated by a distance of 33 feet or more, the Headset and handset will disconnect. (The actual distance may vary depending on the situation.)
- When the handset and Headset are brought back within the required distance, the Headset will automatically reconnect with the handset.
- If the Headset and handset do not automatically reconnect when they are back within the required range, briefly press the power/call button to reconnect manually.

► Volume control

- Briefly press the Volume + or Volume - button to adjust the speaker volume.
- There are eight levels of speaker volume.

Using the Bluetooth® Wireless Headset Part IV

► Calling

Answering A Call

- When there is an incoming call, the Headset will ring.
- Briefly press the power/call button to answer an incoming call.

Making A Call

- Press the power/call button for 1 second to activate last number redial.
(Some handset will show the list of calls.)
- After entering the telephone number, press the power/call button briefly.

Voice Dialing

- Briefly press the power/call button to activated 'Voice command'.
(Your handset must support the 'voice dial' function)

Ending A Call

- Briefly press the power/call button.

Call Waiting

- Answer a second call without hanging up the first call by pressing the power/call button for 1 second.
- Press the power/call button for 1 second to return to the original call.
- Briefly press the power/call button to terminate both calls at once.
(Your handset must support the "call waiting" function)

Transferring A Call

- While on a call, briefly press the power/call button for transferring the audio to the headset.

Mute Microphone

- To make mute microphone during an active call, press Volume+ and Volume- button simultaneously for 1 second.
- When repeating again, mute function is just cancelled.
(On mute microphone, you will hear a beep per 10 seconds.)

Summary of button functions

Function	Status	Action
Power on	Powered off	Press and hold the power/call button for 3 seconds.
Power off	Powered on	Press and hold the power/call button for at least 3 seconds.
Volume +		Press the volume + button briefly.
Volume -		Press the volume - button briefly.
Transferring a call	Talking	Press the power/call button briefly.
Answering a call	Incoming call	Press the power/call button briefly.
Ending a call	Talking	Press the power/call button briefly.
Call waiting	Talking	Press the power/call button for 1 second.
Last number redialing	Ready	Press the power/call button for 1 second.
Voice dialing (Handset should support)	Start & Stop voice command	Press the power/call button briefly.
Pairing mode	Powered off	Press and hold the power/call button for 6 seconds.
Call reject	Incoming call	Press the power/call button for 1 second.

► LED Indication

Operating	Power on	The LED blinks 5 times
	Power off	The LED is on for 2 seconds and then turns off.
	Pairing mode	The LED blinks quickly.
	Headset/Handsfree Profile connected	The LED blinks 2 times every 5 seconds
Charging	Charging	The LED on
	Charging completed	The LED off

Troubleshooting

Does not turn on	Check whether the battery of the Headset is fully charged.	Recharge the battery.
Unable to communicate with Headset	Check to see if handset supports Bluetooth ® wireless technology.	Check whether your handset supports Bluetooth ® wireless technology or Handsfree Profiles.
	Check whether the battery of the Headset is low.	Charge the battery.
Unable to pair the Headset with the Bluetooth ® wireless technology handset device	Check and make sure the Bluetooth ® Headset is on.	Press and hold the power/call button for 3 seconds to turn on Bluetooth ® Headset.
	Check and make sure the Headset is placed in pairing mode.	With the power off, press and hold the power/call button for 6 seconds to place Headset in pairing mode.
When the volume of the headset is too small	Check the speaker volume.	Press the volume + button.

Specification and features

Specification for Bluetooth® wireless technology	V2.0 (Handsfree / Headset Profiles)
Battery	3.7V Li-Polymer
Standby time	Up to 150 hours
Talk time	Up to 7 hours
Charging time	< 3 hours
Temperature of use	14°F ~ 122°F
Size/weight	.67in(W) x 1.97in(L) x .38in(H)/.33oz

Declaration of confirmation

FCC NOTICE TO USERS :

This device complies with part 15 of the FCC rules.

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Operation is subject to the following two conditions:

IMPORTANT NOTE : To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.



Precautions

- >> Do NOT drop the Headset or inflict impact.
- >> Do NOT disassemble, repair modify the Headset on your own.
- >> Do NOT wash Headset with water, alcohol or benzene.
- >> Do NOT use Headset in prohibited places.
- >> Do NOT make a contact with flammable substances.
- >> During a call, do NOT grab this product or your Headset. It will] degrade the quality of your call.
- >> Do NOT place Headset in fire because the battery may explode.
- >> Do NOT store Headset in a place with high humidity or dust.
- >> Do NOT place heavy objects on top of Headset.
- >> Do NOT use near a microwave oven or wireless LAN products.
- >> Do NOT expose Headset to the direct sunlight for long periods of time.
- >> Any defects arising due to arbitrary modification or deformation of the product shall NOT be eligible for the coverage by the warranty.
- >> Use of unauthorized batteries is strictly prohibited.
- >> Please, dispose the battery pursuant to relevant laws and regulations.

■ Limited Warranty ■

FREE OF CHARGE WARRANTY SERVICE:

1. All defective units within the applicable Warranty period/s will be repaired or replaced, in the case those faulty goods were handled normally.
2. If you use device commercially, the warranty period will be reduced by half.

FREE OF CHARGE WARRANTY DOES NOT APPLY TO:

1. Defects or damage resulting from use of the unit in other than its normal and intended manner, eg, in excess of their maximum specifications or operating instructions.
2. Defects or damage from misuse, accident, neglect, improper testing, installation, alteration, modification of any kind, and/or spillage of food or liquid.
3. Faulty is caused by natural disaster.
4. Capacity of expendables is exhausted.

Products name	Cobra Over the Ear Bluetooth® Headset
Model number	CBTH2
Purchased date	
Place of purchase	
Customer Name	
Customer Address	
Telephone #	
Warranty period	1 year

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Cobra Electronics Corporation is under license. Other trademarks and trade names are those of their respective owners.

©2008 Cobra Electronics Corporation

Cobra, Nothing Comes Close to a Cobra and the snake design are registered trademarks of Cobra Electronics Corporation, USA. Cobra Electronics Corporation is a trademark of Cobra Electronics Corporation, USA.

Aries
2001 West Kelley Court
Libertyville, IL 60048
www.CobraHandsfree.com
866.610.9322 (USA only)